

## XBO 150 W/CR OFR

XBO | Xenon short-arc lamps without reflector



### Product benefits

- Very high luminance (point light source)
- Continual color quality, irrespective of lamp type and lamp wattage
- Constant light color throughout the life of the lamp
- Long lamp life

### Product features

- Color temperature: approx. 6,000 K (Daylight)
- High color rendering index:  $R_a >$
- Continuous spectrum in the visible range
- High arc stability
- Hot restart capability
- Dimmable
- Instant light on starting



## Technical data

### Electrical data




Lamp wattage	125 W
Lamp current	8.5 A
Type of current	DC
Nominal wattage	150.00 W

### Photometrical data

Nominal luminous flux	2900 lm
Luminous intensity	290 cd <sup>1)</sup>
Luminance	20000 cd/cm <sup>2</sup> <sup>1)</sup>

<sup>1)</sup> Typical initial photometric value

### Dimensions & weight



Length	150.0 mm
Mounting length	127.0 mm
Length with base excl. base pins/connection	127.00 mm
Light center length (LCL)	57.0 mm <sup>1)</sup>
Electrode gap cold	2.0 mm
Product weight	100.00 g
Diameter	20.0 mm

<sup>1)</sup> Distance from end of base to tip of electrode (cold)

### Temperatures & operating conditions

Max. permitted ambient temp. pinch point	230 °C
--	--------


### Lifespan

Lifespan	3000 / 1200 h <sup>1)</sup>
----------	-----------------------------

Product datasheet

1) In vertical burning position / In horizontal burning position

Additional product data

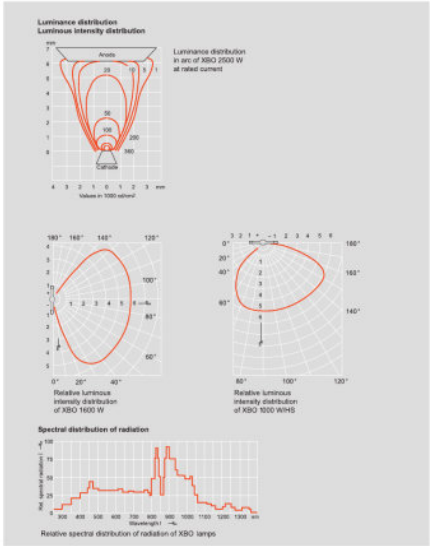

Luminous intensity distribution

Base anode (standard designation)	SFc12-4
Base cathode (standard designation)	SFcX12-4
Product remark	OFR = Ozone-free version

Capabilities

Cooling	Forced
Burning position	s15 1)

1) For vertical burning position: anode (+) on top


Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4050300508788	OSRXBO150CROFR	-	-	-

# Product datasheet

## Safety advice

Because of their high luminance, UV radiation and high internal pressure in both the hot and cold state, XBO lamps must only be operated in appropriate enclosed casings. Always use the protective jackets supplied when handling these lamps. They may only be used as open lamps if appropriate safety measures are taken. More information is available on request or can be found in the leaflet included with the lamp or the operating instructions.

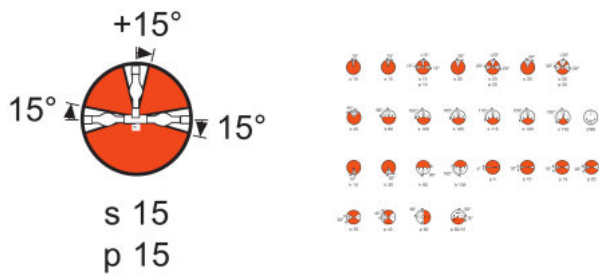

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300508788	XBO 150 W/CR OFR	Folding carton box 1	250 mm x 59 mm x 95 mm	1.40 dm <sup>3</sup>	180.00 g
4050300508795	XBO 150 W/CR OFR	Shipping carton box 10	259 mm x 314 mm x 225 mm	18.30 dm <sup>3</sup>	2028.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## References / Links

Further technical information on XBO lamps and information for manufacturers of operating equipment can be requested directly from OSRAM.

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.